




ORDER DETAILS

CODE: 85007.200042
 Colours: 631 Green/Grey
 Size: 0/S

PRODUCT DETAILS

4 x 12m
 4 x 10

STEP 1:

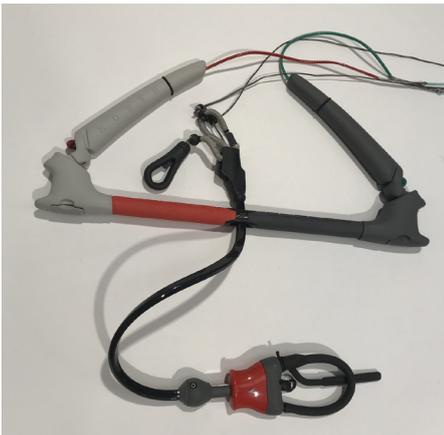

Place control system on the ground with the red line winder bungee tab on the left end of the bar. Unwind and run the lines.

STEP 2:



Remove the Line Connectors* from the existing lines by disconnecting the loop to loop connection and set them aside. Take note of the Line Connector configuration.

For North kites the knotted end connectors go on the Grey (front) lines and the larks head loop connectors go on the Green (rear) lines. The red Line Connectors attach to the left-hand lines (as correspond with the coloured line winder bungee tab). The green Line Connectors attach to the right-hand lines.

*Note: The photo shows the correct North Line Connector configuration. For non-North kites take note of the kite specific Line Connector configuration.

STEP 3:



Detach the Green (rear) lines from the control bar by disconnecting the loop to loop connection at the end of the leader lines extruding from the bar float.

STEP 4:



Identify the longer (12m) section of the new lines. The 12m section should be attached to the control bar leader lines, the 10m section should be attached to the kite. Attach the new 12m section of the lines to the control bar leader lines using the loop to loop connection.

STEP 5:



Detach the Grey (front) lines from the control bar by firstly removing the dead-end loop beneath the Power Bracket. Disconnect the loop-to-loop connection between the line and the dead-end loop freeing the line from the Power Bracket.



WARNING: Failure to install this product correctly may result in serious bodily injury or death. Please contact your local North Retailer for support and ask for a qualified and experienced repair shop to carry out the repair. If you choose to carry out this repair yourself, please read and understand all steps contained in this installation guide before commencing installation. Take all necessary safety precautions. Safety precautions may include taking extreme care when using sharp objects and wearing all personal protective equipment necessary.

STEP 6:



Detach the remaining Grey (front) line from the control bar by pulling the Landing Line through the Quick Release until the Landing Line to Grey (front) line loop-to-loop connection is revealed. Detach the loop-to-loop connection between the Landing Line and Grey (front) line. Once free, pull the Grey (front) line back through the multibore tubing and free it from the Power Bracket.

STEP 7:




Identify the longer (12m) section of the new Grey (front) line that has the line stopper located on it. This section should be attached to the bar, the shorter (10m) section should be attached to the kite. Thread the free end of the longer (12m) section down through the Power Bracket, cleat base, multibore tubing and Quick Release and re-connect it to the Landing Line using the loop-to-loop connection. You may need to use a section of flattened nylon to thread the line. Then from above the Power Bracket pull the new Grey (front) line until the loop-to-loop connection is just beneath the Power Bracket.

STEP 8:



Attach the 12m end of the new Grey (front) Line not containing the line stopper to the power bracket, anchoring it beneath the power bracket by attaching the dead-end loop using the loop to loop connection.

STEP 9:

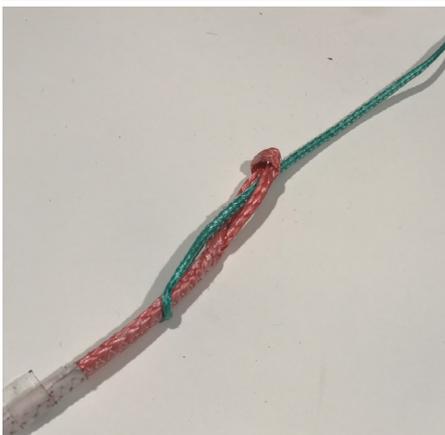

For North kites re-attach the Line Connectors to the ends of the new upper lines using the orientation outlined in Step 2.

NOTE: For non-North kites ensure the orientation of the Line Connectors matches your specific kite configuration.



WARNING: Failure to install this product correctly may result in serious bodily injury or death. Please contact your local North Retailer for support and ask for a qualified and experienced repair shop to carry out the repair. If you choose to carry out this repair yourself, please read and understand all steps contained in this installation guide before commencing installation. Take all necessary safety precautions. Safety precautions may include taking extreme care when using sharp objects and wearing all personal protective equipment necessary.